

{{1pagina-template-foto}}

Sequenza Mini

SMR002



Wall attachment
includes 2 single cleat E012

LED: 8x2 W | 350 mA | 3000K | CRI 90
8x332 lm | 166 lm/W | > 50.000h | T 55°C
ALIMENTATORE remoto: 350mA | 220/240V | 50/60 Hz
Dimmer elettronico: 0/10-1-10-PUSH
Layout lampada modificabile a richiesta.

A++

LED

IP20

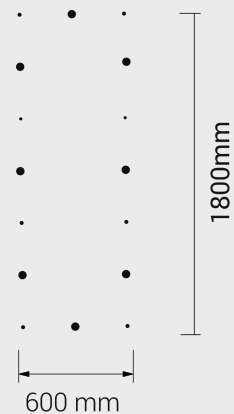

Finishes

OT: Brushed brass
BR: Bronze
RA: Copper

NI: Nickel
NE: Black

Diffuser

99: Full vitrified PMMA

Accessories

Electronic dimmer: DALI