



Sequenza

SQ202




Sequenza

SQ202

Wall attachment
includes 2 single cleat E012

LED: 4x4,5 W | 24 V | 3000K | CRI 90
3040 lm | 169 lm/W | > 60.000h | T 60°C
ALIMENTATORE: 24 V | 220/240V | 50/60 Hz
Dimmer elettronico: 0/10-1-10-PUSH

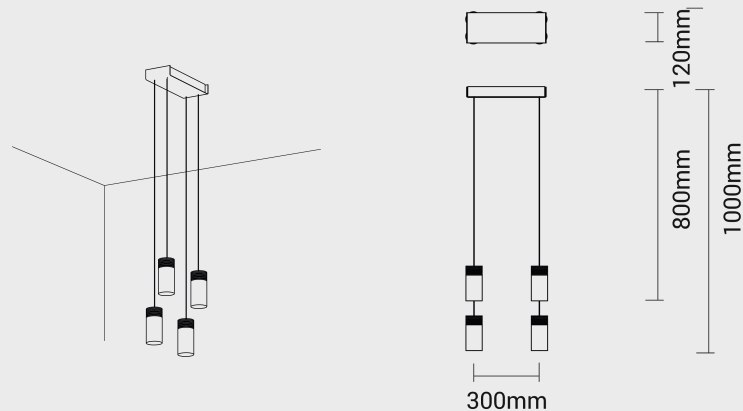

Finishes

	OT: Brushed brass		NI: Nickel
	BR: Bronze		NE: Black
	RA: Copper		

Diffuser

00: Full transparent PMMA **99:** Full vitrified PMMA

Accessories

Electronic dimmer: DALI

A++

LED

IP20

