

invenso
LUCE D'AUTORE

Lybra

SQL001





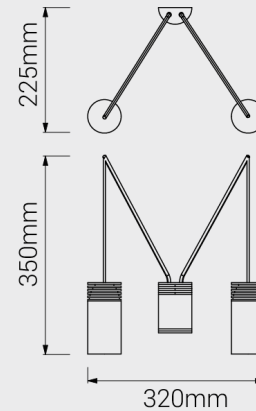
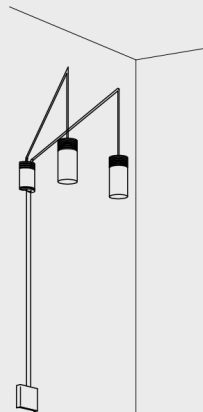
Equilibrio in sequenza

Lybra






SQL001

Wall attachment
includes 2 single cleat E012

LED: 2x4,5 W | 24 V | 3000K | CRI 90
1520 lm | 169 lm/W | > 60.000h | T 60°C
ALIMENTATORE: 24 V | 220/240V | 50/60 Hz
Dimmer elettronico: 0/10-1-10-PUSH



Finishes

 OT: Brushed brass	 NI: Nickel
 BR: Bronze	 NE: Black
 RA: Copper	

Diffuser

00: Full transparent PMMA	99: Full vitrified PMMA
----------------------------------	--------------------------------